BUSINESS AND HOME SECURITY

COLOR PROFESSIONAL CAMERA

WIDE ANGLE LENS INCLUDED

FEATURES

- Electronic IRIS - The electronic IRIS function enables continuous automatic control of the shutter between 1/60~1/100,000 seconds
- C/CS Lens Mount Allows for Lens Option Flexibility
- 12V DC/24V AC Dual Voltage Operation

SPECIFICATIONS

Image Sensor Type:	1/3" Color CCD Image Sensor
Video Format:	NTSC
Effective Pixels:	NTSC: 512H x 492V(251K)
Horizontal Resolution:	420 TV Lines
Scan System:	NTSC: 525 Lines 2:1 interlace
Sync System:	Internal
S/N Ratio:	More than 48dB without AGC
Iris:	ELC/DC/VIDEO
AES Shutter Speed:	NTSC: 1/60 ~ 1/100,000 Sec.
Mini Illumination:	0.05 LUX
Video Output:	Composite 1.0 Vpp @ 75 ohm
Lens Focal Length/Type:	3.6 mm CS Mount
FOV (Diagonal):	92 degrees
Termination:	BNC, Power DC Jack
IR LED/ Night Vision Range:	N/A
Power Requirement:	12 V DC +/- 10% / 24V AC
Power Consumption:	120 mA or 1.5W
Operating Temp Range:	14°~122° F / -10° ~ 50° C
Environmental Rating:	Indoor. Housing required for outdoor use
Built-in microphone/speaker	No

PRODUCT INFORMATION

UPC:	7-78597-08001-8
Package Weight:	1.625kg / 3.58lb
Package Dimensions:	290mm (w) x 207mm (h) x 87mm (d) 11.4" (w) x 8.15" (h) x 3.42" (d)
Package Cube:	0.00516m / 0.18444ft
Includes:	1 x 3.6mm Wide Angle Lens 1 x Mounting Bracket 1 x 60ft Extension Cable 1 x 12V DC Power Adapter

DIMENSIONS

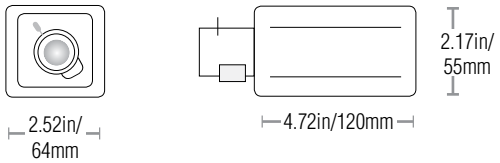

LOREX®

CVC8001

www.lorexcctv.com

Lorex Technology Inc.

300 Alden Road, Markham,
Ontario L3R 4C1
Canada.

3700 Koppers Street
Baltimore, Maryland 21227,
USA.

©2008 Lorex Technology Inc.
As our product is subject to continuous improvement, Lorex Technology & subsidiaries reserve the right to modify product design, specifications & prices without notice and without incurring any obligation. E&OE

1-23052008